

# GL 80 LED outdoor LED PROJECTOR



## SPECIFICATIONS


item:.....	GL 80 LED outdoor
body: .....	aluminium
available colours: .....	silver-grey
weight:.....	8.1 kg
on / off switch:.....	not available
environmental conditions:.....	outdoors, humid interiors
cooling:.....	active ventilation
light source: .....	80 W Extreme-Power LED
recommended projections distance in normal room light: .....	8 m
recommended projection distance in darkness: .....	20 m
average lifetime of the LED: .....	30,000 operating hours
colour temperature: .....	6,300 - 6,700° Kelvin
luminous flux of the LED: .....	5,750 lumens
gobo size / image size: .....	Ø 50 mm / Ø 40 mm
voltage: .....	220 - 240 V AC, 50 / 60 Hz
active power (power consumption):.....	94 W
efficiency:.....	0.95 cos. φ
IEC Protection Class:.....	Class I
Ingress Protection Rating:.....	IP 23
changeable lens:.....	yes, several focal lengths are available
lighting effects:.....	not available
connectors:.....	1 x 15 V DC
photobiological safety:.....	ICE62471:2006 EN62471:2008: RG-2
item number:.....	20004530 (silver-grey)

## COMPONENTS


Standard series with extreme power LED, 85 mm standard lens, power cable with plug. The machine is ready to plug in and run. Required accessories: glass gobo with individually designed motif.

## PROJECTION DIAMETER WITH INCREASING DISTANCE


(with Standard Lens,  $f=85\text{ mm}$ )

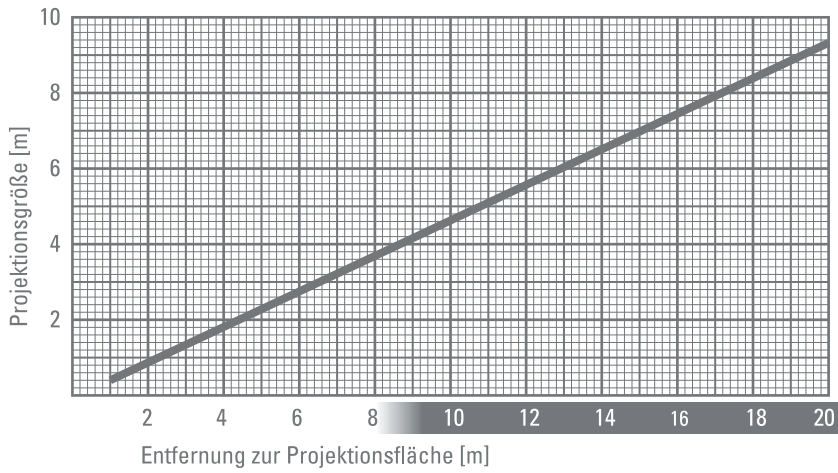

## DIMENSIONS

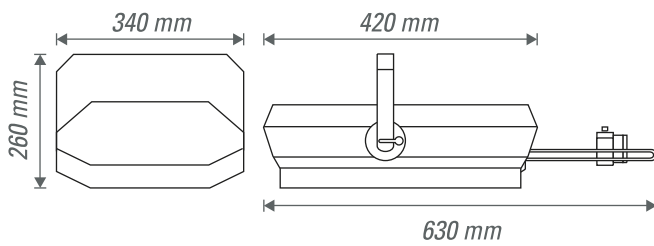

IP 23



derksen®  
lichttechnik

Derksen Lichttechnik GmbH  
Sauerlandstraße 5  
45889 Gelsenkirchen  
Germany

Phone: +49 (0) 209/980 70-0  
Fax: +49 (0) 209/980 70-60

info@derksen.de  
www.derksen.de